




# Technical Data

# TrimLineSeries™ RECESSED WASTE RECEPTACLE WITH DISPOSAL DOOR

# B-35633

### Specify Finish Required

- Stainless Steel, Satin Finish
- Matte Black Finish, please use model no. B-35633.MBLK

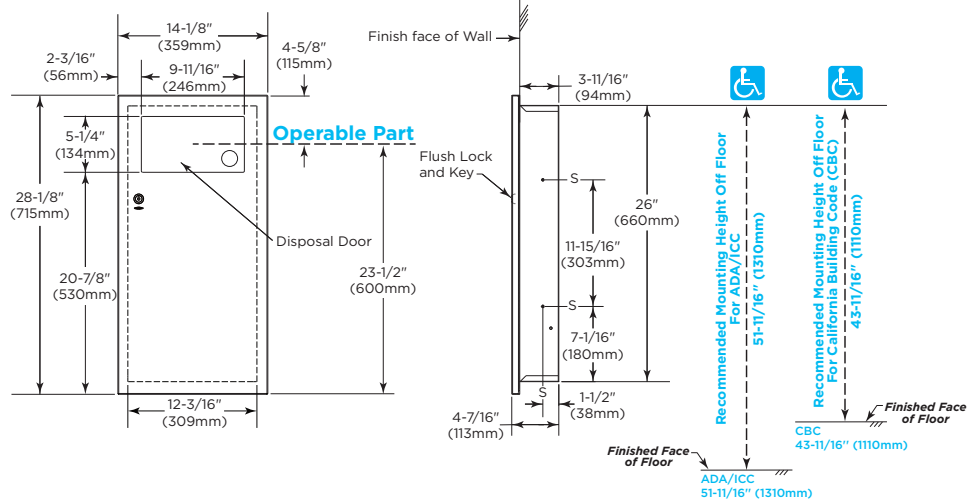

**Rough Wall Opening**  
 12-5/8" (321mm) wide  
 26-1/2" (673mm) high  
 3-3/4" (95mm) minimum  
 recessed depth

**ADA/CBC Installation Guidance**  
 \*Operable Part: Center of waste disposal push door.  
**Maximum mounting height of Operable Part:**  
 ADA/ICC: 48" above finished floor (AFF)  
 CBC: 40" above finished floor (AFF)  
 \*For more information regarding operable parts, please refer to Bobrick Planning Guide for Accessible Restrooms, page 9.

### MATERIALS:

**Cabinet** — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Exposed surfaces have satin finish or matte black, as specified.

**Door** — 18-8, Type-304, 18-gauge (1.2mm) stainless steel with satin finish or matte black, as specified. Secured to cabinet with a concealed, full-length stainless steel piano-hinge. Equipped with one tumbler lock keyed like other Bobrick washroom accessories. Tumbler lock flush with the door - no protrusion. Self-closing push door mounted on continuous stainless steel piano hinge.

**Disposal Door** — 18-8, Type-304, heavy-gauge stainless steel with satin finish. Secured to cabinet with spring-loaded, full length stainless steel piano hinge. Equipped with International graphic symbol identifying waste disposal.

**Waste Receptacle** — 18-8, Type-304, heavy-gauge stainless steel. All-welded construction. Removable for servicing. Capacity: 3-gal. (11.3-L).

### OPERATION:

To service waste receptacle, unlock door with key provided and remove waste container. Cable door-swing limiter prevents damage to washroom accessories and walls.

### INSTALLATION:

Provide framed rough wall opening 12-5/8" wide x 26-1/2" high (321 x 673mm). Minimum recessed depth required from finish face of wall is 3-3/4" (95mm). Allow clearance for construction features that may protrude into rough wall opening from opposite wall. Coordinate with mechanical engineer to avoid pipes, vents, and conduits in wall. Mount cabinet with shims between framing and cabinet at all points indicated by an S, then secure unit with (4) #10 x 1-1/4" (4.8 x 32mm) sheet-metal screws (not furnished).

### Replacement Parts:

Skirt Replacement Kit	35639-53
Door Replacement Kit	35639-173
Waste Receptacle Replacement Kit	35639-83

### SPECIFICATION:

Recessed waste receptacle with disposal door shall be Type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish or matte black, as specified. Door shall be Type-304, 18 gauge (1.2mm) secured to cabinet with a concealed, full-length stainless steel piano-hinge, cable door-swing limiter and equipped with a tumbler lock keyed like other Bobrick washroom accessories. Tumbler lock flush with the door - no protrusion. Waste receptacle shall be Type-304, heavy-gauge stainless steel. All-welded construction with a capacity of 3-gal. (11.3-L).

**Recessed Waste Receptacle with Disposal Door shall be Model B-35633 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; and Bobrick Washroom Equipment Limited, United Kingdom.**

